

Dowdeswell

Furrow Presses



- Strong, rugged design
- Three adjustable frame options
- Choice of 30° and 45° rim angles

The Dowdeswell range of Adjustable Furrow Presses, offer a choice of specification – to help match your soil conditions and particular needs.

The 30° rings are the general-purpose option for cutting down & pressing of heavy soils or the compaction of medium soils.

The 45° rings are particularly beneficial on lighter soils. The wider ring angle produces a greater firming action and its additional weight (8Kg) per ring ensures consolidation of the soil surface.

Key Features.

- Telescopic adjustable axles.
- Rings can be added or removed.
- Heavy duty ball bearings.
- Draw arm height adjuster.
- Link tie-bar with friction plate to maintain draw arm position.
- Cleaning chains.



All New Dowdeswell Furrow Presses are covered by our comprehensive two-year warranty.

Dowdeswell Demonstration Service

To be sure that you are choosing the right machine type and most suitable model for your land – ask for a demonstration on your own farm.

Simply call 01926 812335 or contact your Dowdeswell Dealer.

Dowdeswell Engineering Co. Ltd.

Blue Lias Works,
Stockton Road, Stockton,
Southam, Warwickshire.
CV47 8LD.

Tel: (01926) 812335

Fax: (01926) 817494

E-Mail: sales@dowdeswell.co.uk


Web Site: www.dowdeswell.co.uk

The Dowdeswell Furrow Press Range

The Dowdeswell Furrow Press Range has been specifically designed to meet the needs of farmer's where high performance, ease of use and cost are of prime concern.

Dowdeswell's renowned quality engineering has been built into this press range which, together with our full two year warranty, offers outstanding value.

Ring Profile

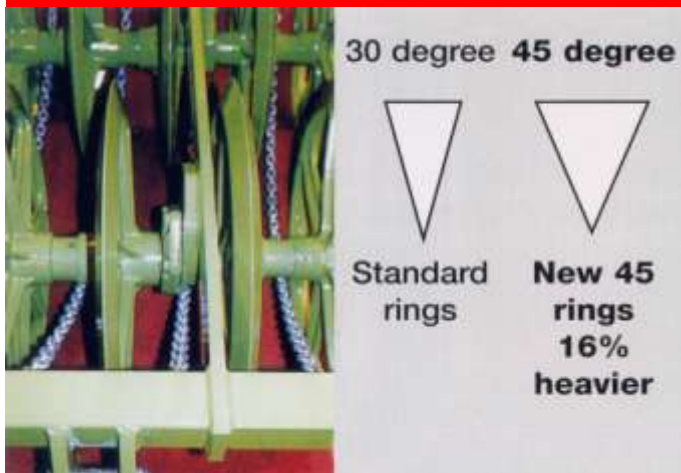

Plough Press Arms



Plough press arms are available for all Dowdeswell reversible plough, shearbolt or reset.

An optional hydraulic release mechanism (pictured) is also available.

Adjustable Furrow Press Specifications

Model N°	Ring Quantity	Working Width		Weight 30°	Weight 45°	DFPL 30° Only
		cm	inches			
DAFP/S	17	160	63	870	1006	Yes
	19	180	71	940	1092	Yes
	21	200	79	1005	1183	Yes
	23	220	87	1080	1264	Yes
	25	240	95	1140	1345	Yes
DAFP/M	21	200	79	1040	1280	Yes
	23	220	87	1110	1294	Yes
	25	240	95	1185	1385	Yes
	27	260	102	1250	1466	No
	29	280	110	1320	1552	No
DAFP/L	31	300	118	1390	1648	No
	29	280	110	1400	1610	No
	31	300	118	1470	1718	No
	33	320	126	1545	1809	No
	35	340	134	1600	1880	No
	37	360	142	1660	1956	No
	39	380	150	1735	2047	No
41	400	157	1800	2133	No	

Front Press Linkage



Dowdeswell Furrow Presses with 30° rings are suitable for attaching to the Dowdeswell Front Press Linkage. A conversion kit is required for an existing trailed press & is included if the press is bought for the Front Press Linkage

See specification chart above for size limits for the Front Press Linkage